


BOMBOM 4 stars

5003-4STT

Design Favaretto&Partners

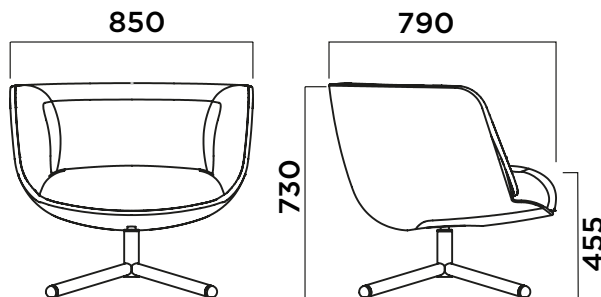

FRAME

TELAIO
BASTIDOR

4 stars base in stainless steel in round tube diameter 38 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule.

Leading edge tube in stainless steel in round tube diameter 50 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule. Support seat plate, diameter 250 mm, thickness 8 mm, accordingly with UNI EN 10130 rule, with welded pin, diameter 28 mm.

Base 4 razze in acciaio inox in tubo tondo diametro 38 mm, spessore 2 mm, secondo norma UNI EN 10305-3. Tubo portante in acciaio inox in tubo tondo diametro 50 mm, spessore 2 mm, secondo norma UNI EN 10305-3. Piastra sostegno seduta, diametro 250 mm, spessore 8 mm, secondo norma UNI EN 10130, con perno saldato, diametro 28 mm.

Base de 4 radios de acero inoxidable de tubo redondo de 38 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3.

Tubo redondo del borde delantero, de acero inoxidable, de 50 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3. Placa de soporte de asiento, diámetro 250 mm, 8 mm de espesor, conforme a la norma UNI EN 10130, con perno soldado, diámetro 28 mm.



01



13



31

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Rigid cold-foamed polyurethane shell. Seat and back in soft cold-foamed polyurethane.

Scocca in poliuretano rigido schiumato a freddo. Sedile e schienale in poliuretano morbido schiumato a freddo.

Carcasa de poliuretano expandido en frío rígido. Asiento y respaldo de poliuretano blando expandido en frío.

- A Space
- B Eco Leather
- C Step, Step Melange, Nuvole, Norfolk
- D Revive , Reflect , Rolla
- E Oceanic , Yoredale, Volta Celeste
- F Steelcut Quartet, Canvas2
- G Divina Melange, Fiord
- H Full Leather, Safire

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 μ . Painted frame with epoxy-polyester powder with average thickness of 50 μ .

Telaio cromato con spessore medio 5 μ . Telaio verniciato con polveri epossipoliesteri spessore medio 50 μ .

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

CERTIFICATIONS


CERTIFICAZIONI
CERTIFICADOS



BOMBOM 4 legs

5003-4LGT

Design Favaretto&Partners

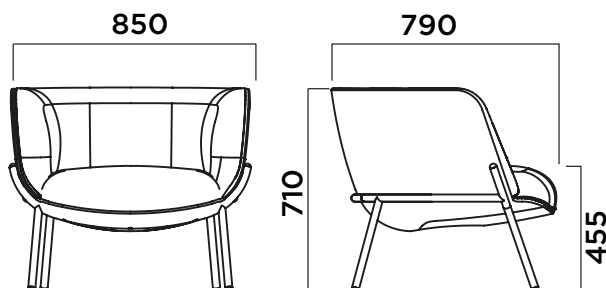

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 25 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.

Telaio in metallo con tubo tondo di diametro 25 mm, spessore 2 mm, in conformità della norma UNI EN 10305-3 in Asform.

Bastidor metálico de tubo redondo de 25 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



01



13



31

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Rigid cold-foamed polyurethane shell. Seat and back in soft cold-foamed polyurethane.

Scocca in poliuretano rigido schiumato a freddo. Sedile e schienale in poliuretano morbido schiumato a freddo.

Carcasa de poliuretano expandido en frío rigido. Asiento y respaldo de poliuretano blando expandido en frío.

- A Space
- B Eco Leather
- C Step, Step Melange, Nuvole, Norfolk
- D Revive , Reflect , Rolla
- E Oceanic , Yoredale, Volta Celeste
- F Steelcut Quartet, Canvas2
- G Divina Melange, Fiord
- H Full Leather, Safire

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 μ . Painted frame with epoxy-polyester powder with average thickness of 50 μ .

Telaio cromato con spessore medio 5 μ . Telaio verniciato con polveri epossipoliesteri spessore medio 50 μ .

Cromado con 5 μ de espesor medio. Bastidor con recubrimiento en polvo epoxi-poliéster con 50 μ de espesor medio.

FEET

PIEDINI
PIES DE APOYO

Polypropylene

Polipropilene

Polipropileno